

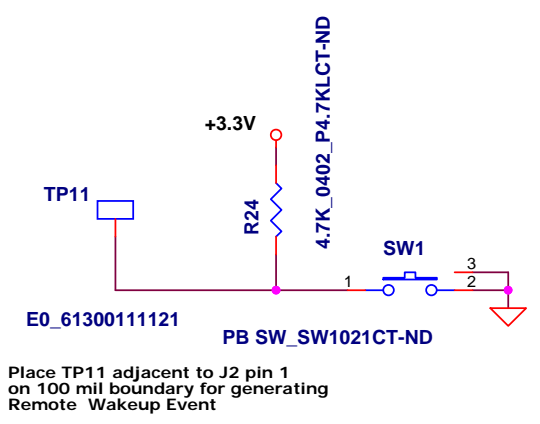
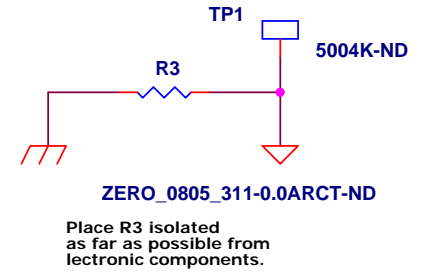
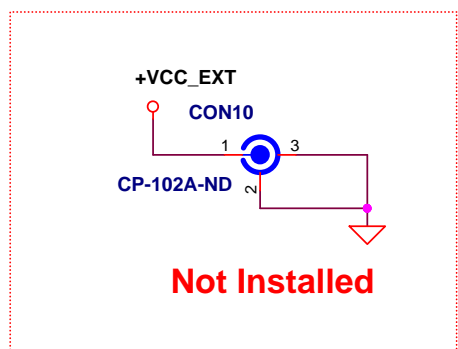


If power consumption of +3.3V\_INT exceeds 50 mA, use +3.3V\_EXT instead.






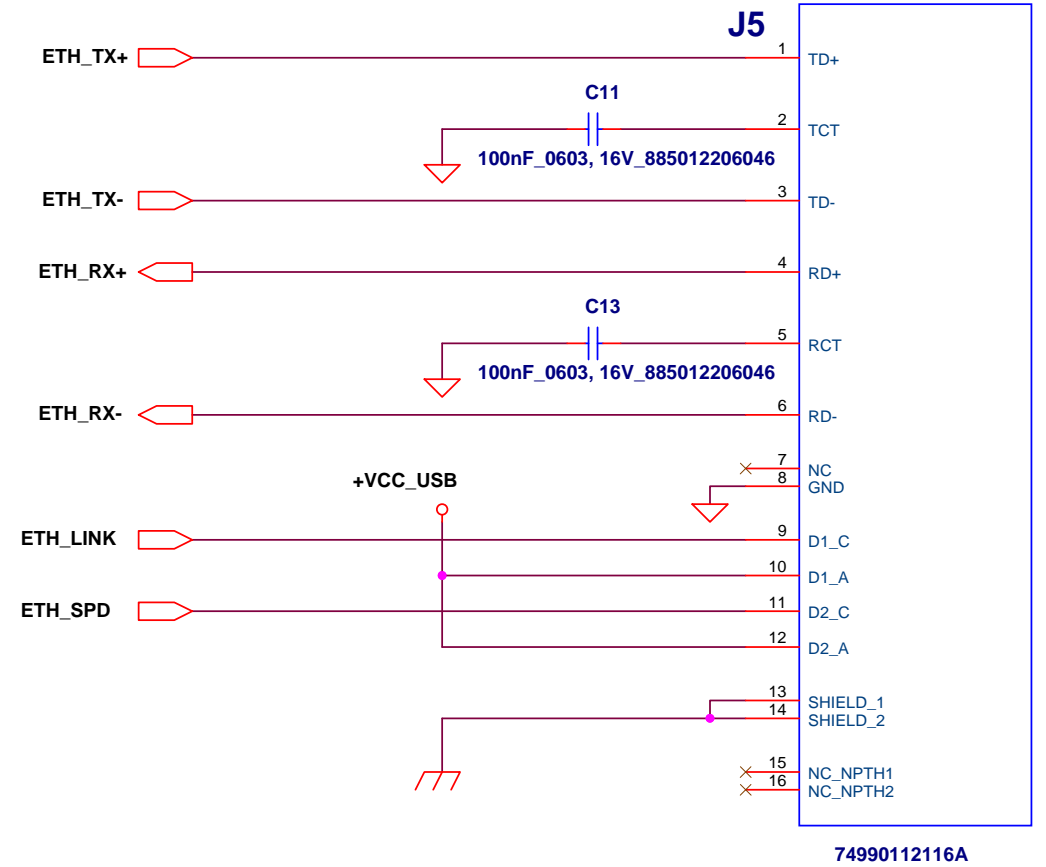


9/24/2015

Title		
<b>XR22801IL32 EVALUATION BOARD</b>		
Size	Document Number	Rev
	<b>USB, POWER, ETHERNET &amp; RS232</b>	<b>2.0</b>
Date:	Tuesday, October 20, 2015	Sheet 1 of 4

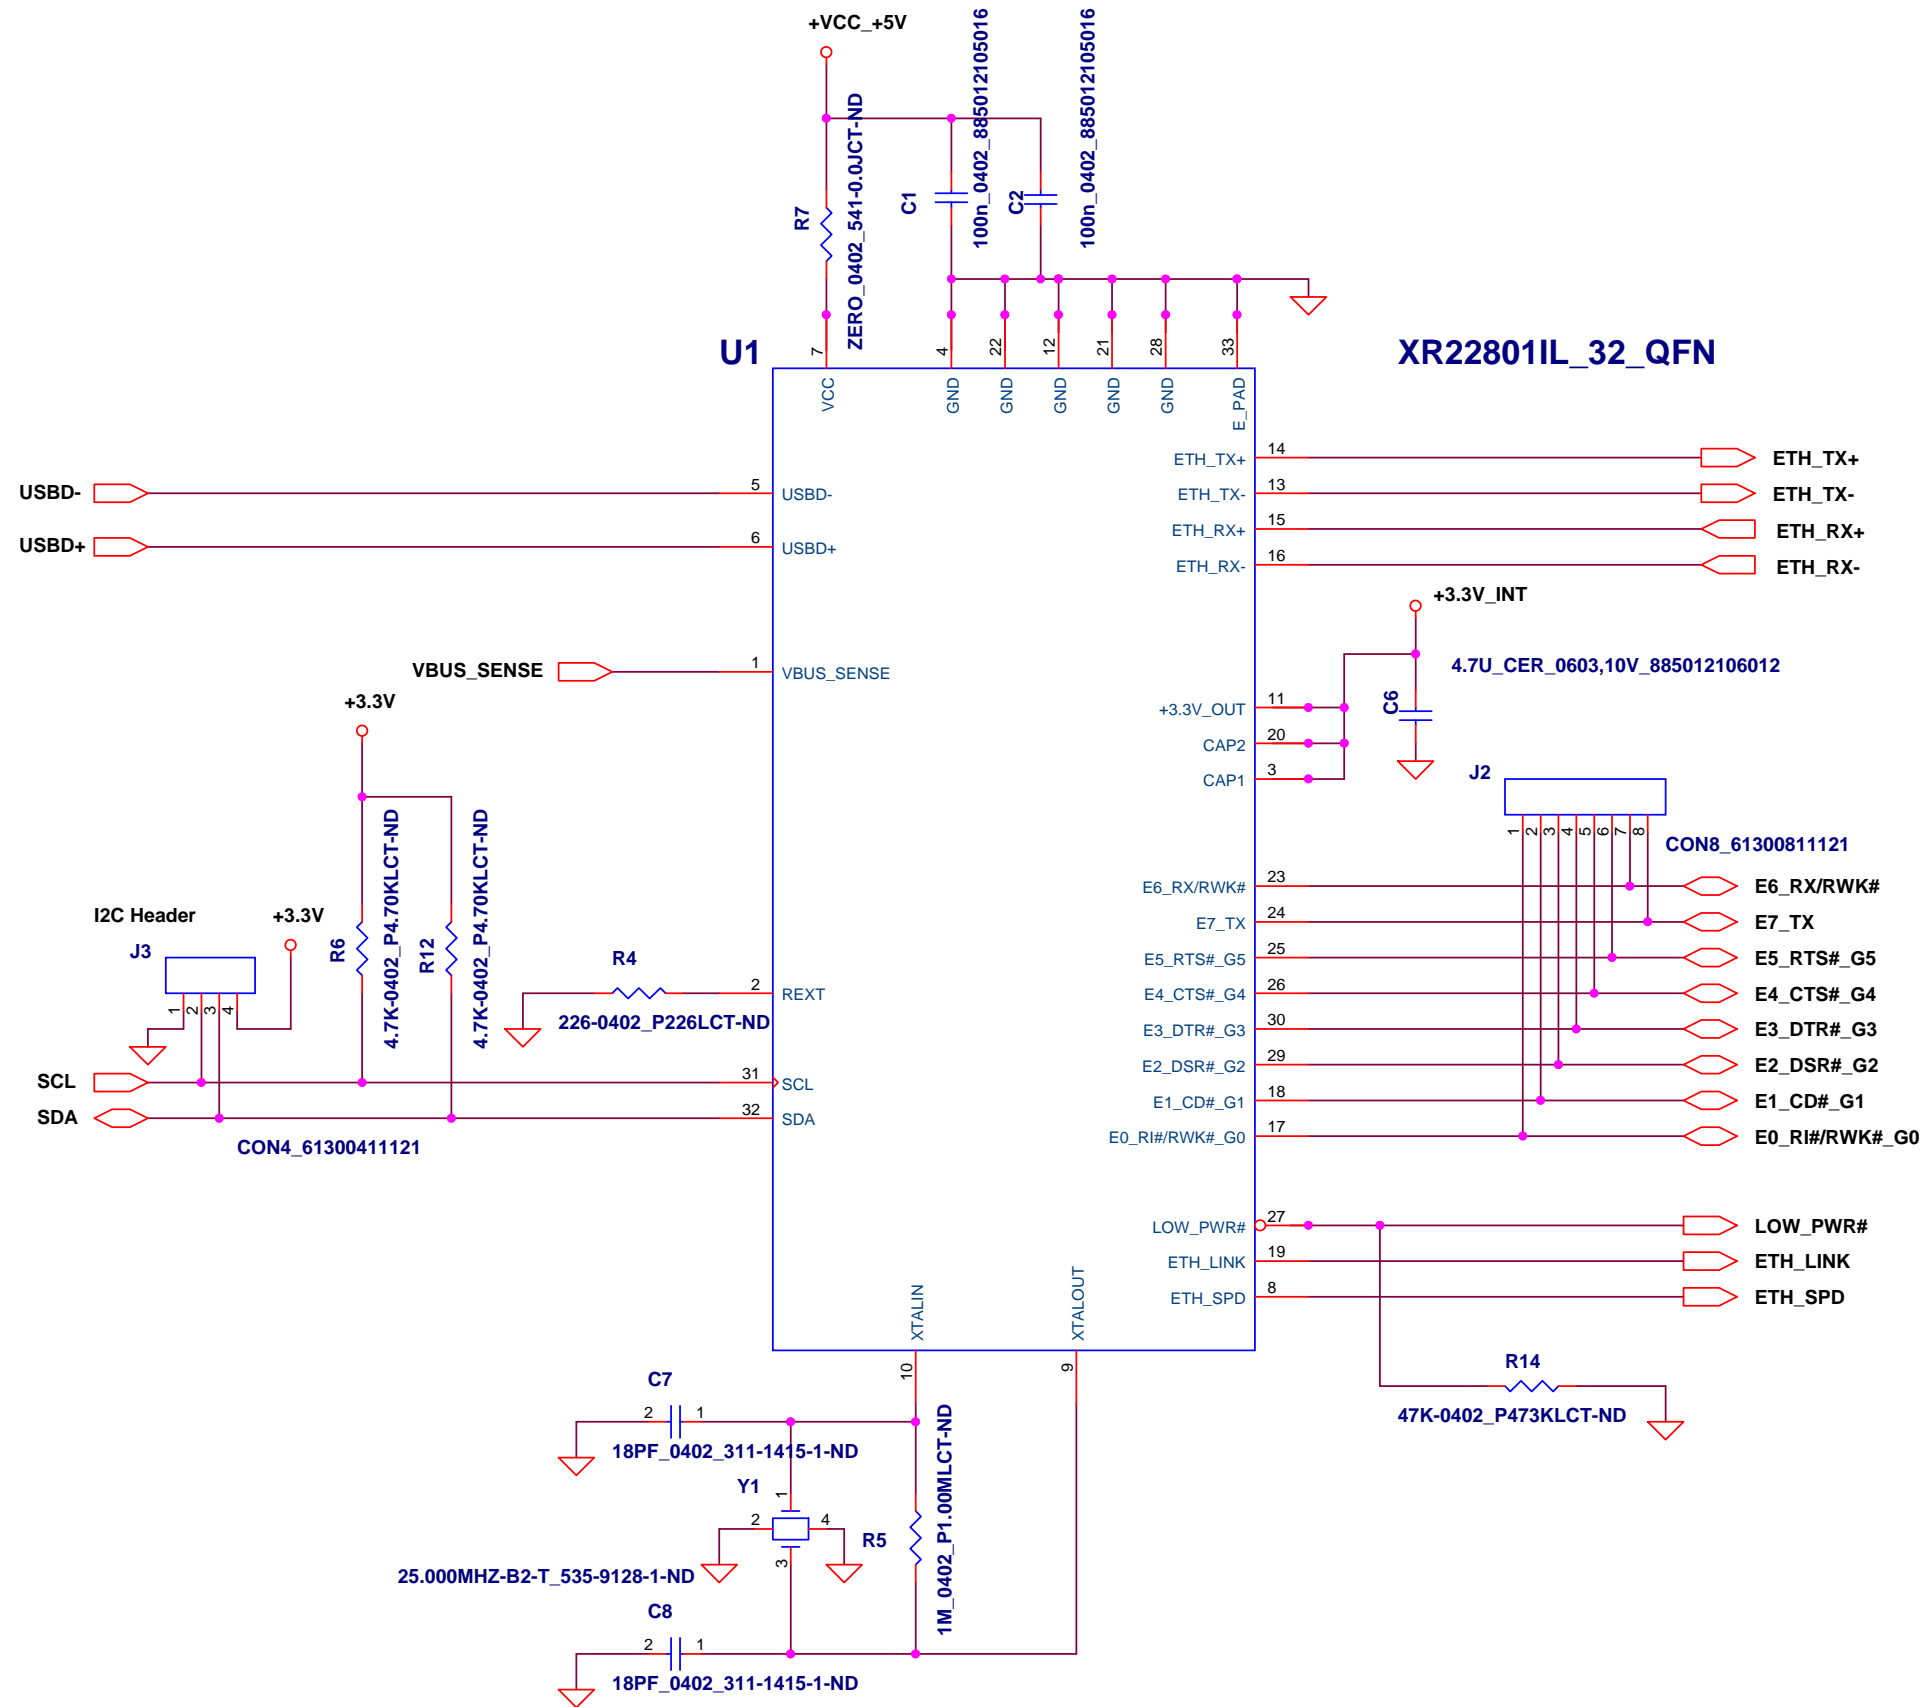

Title		
<b>XR22801IL32 EVALUATION BOARD</b>		
Size	Document Number	Rev
Custom	<b>XR22801</b>	<b>2.0</b>
Date:	Wednesday, October 07, 2015	Sheet 2 of 4

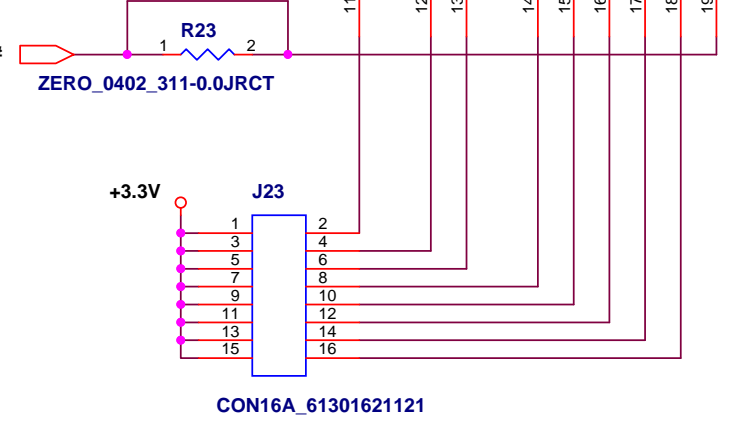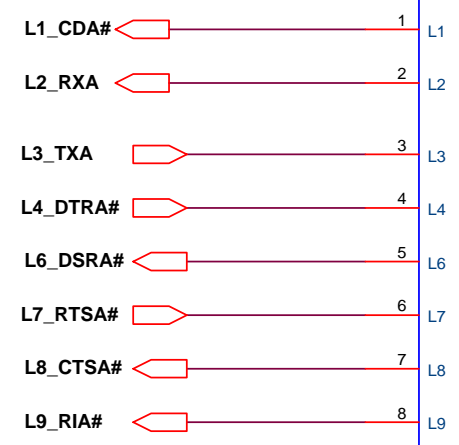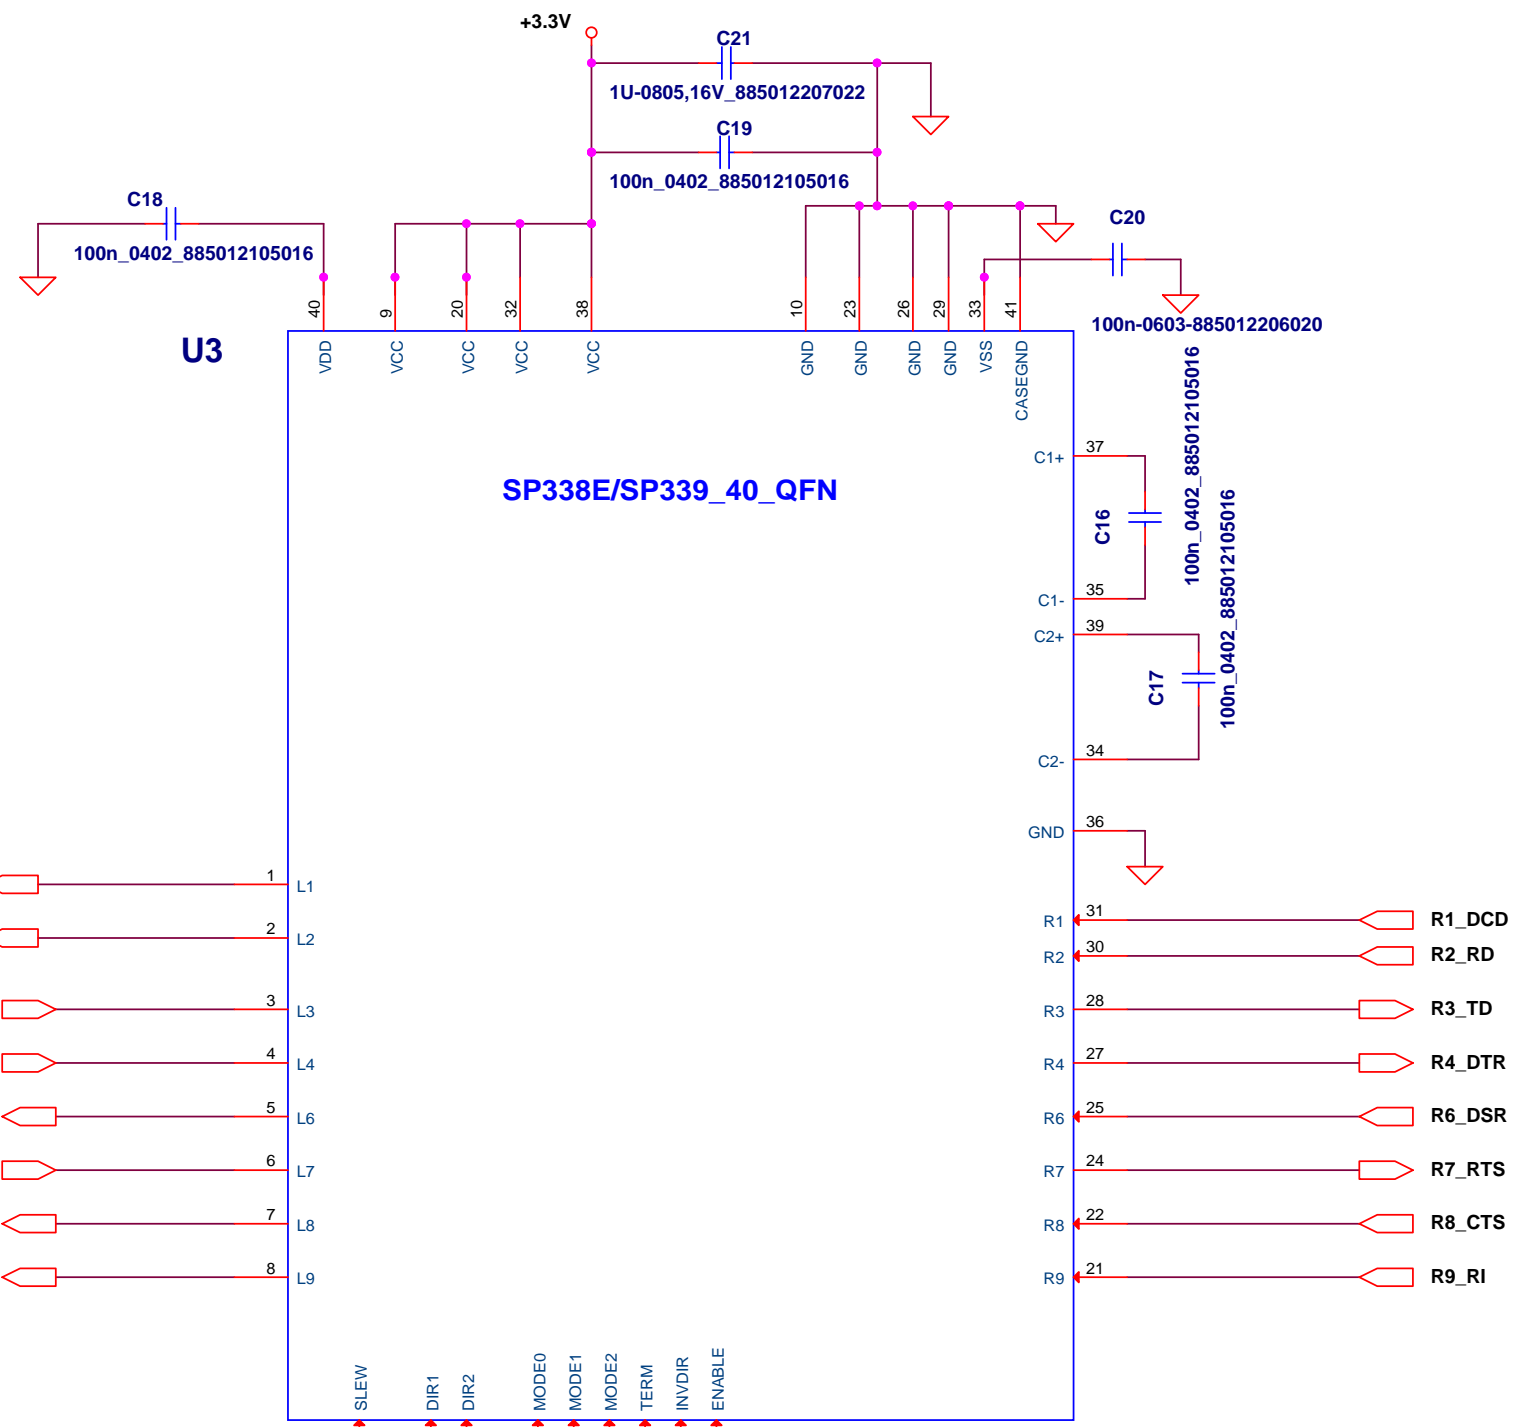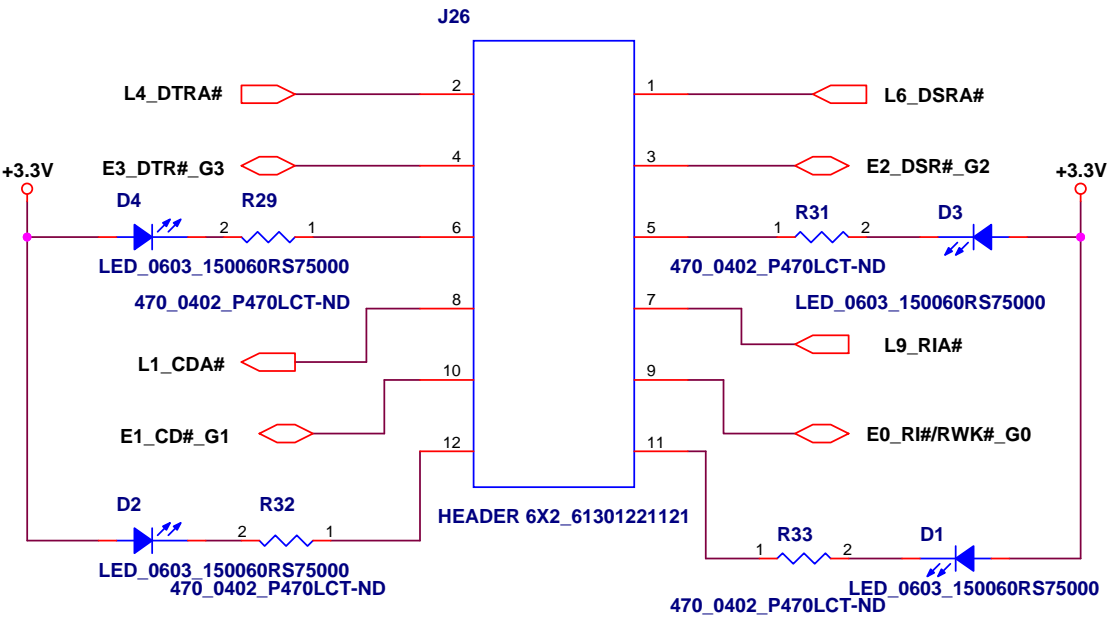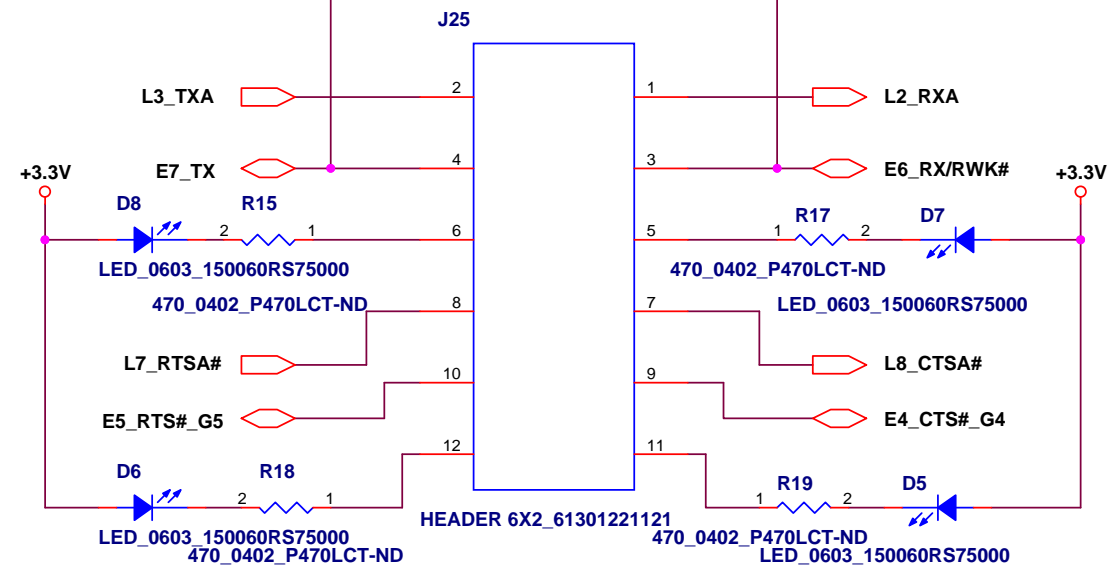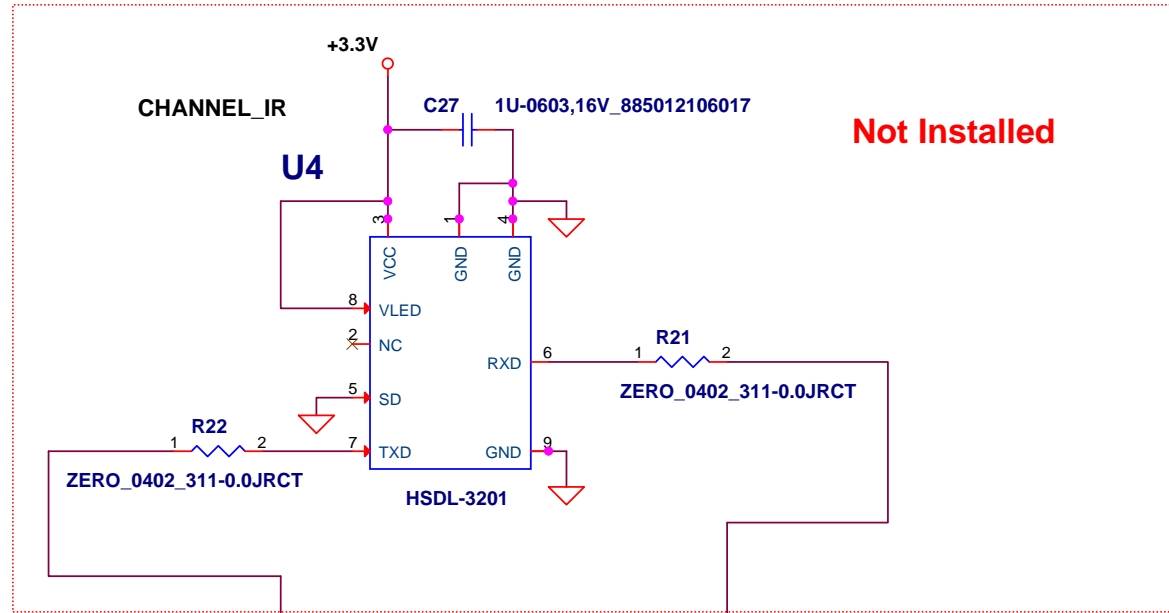

Schematic		
Title		
<b>XR22801IL32 EVALUATION BOARD</b>		
Size	Document Number	Rev
Custom	<b>SP338</b>	<b>2.0</b>
Date: Wednesday, October 07, 2015	Sheet 3 of 4	